



VIDEO



LED WALL LIGHT

3W

specification

Product Name :	LED WALL LIGHT
Model No. :	NX-WL6Y-1606L-3W / NX-WL6Y-1606L-BK-3W
Specification :	AC220-240V, 50/60Hz, 26mA, 3W
Working Temp :	-10~40(°C)
Power Factor :	0.5
CRI(ra) :	80
Body Color :	White / Black
Light Source :	LED SMD Chip
Lumen :	30 LM/W
Life Time :	25000 hrs
Beam Angle :	100°
Product Size :	Φ110*15mm
IP :	IP20
Application :	Home, Shop, Hotel...etc
Warranty :	2 years
Standard :	CE

Color Temperature:

3000K / 4000K / 6500K







3W

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.35V I:0.025A P:3.08W PF:0.5432 Freq:49.99Hz Lamp Flux:94.8153x1 lm		
NAME: LED WALL LIGHT	TYPE:LED	WEIGHT:
SPEC.: NX-WL6Y-1606L-BK-3W-30K	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 30.76 lm/W
MODEL	NX-WL6Y-1606L-BK-3W-30K	Imax (cd)	103.7	S/MH (C0/180)	1.27	
NOMINAL POWER (W)	3	LOR (%)	100.0	S/MH (C90/270)	8.93	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	94.815	η UP, DN (C0-180)	1.1, 1.7	
NOMINAL FLUX (lm)	94.8153	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 97.1	
LAMPS INSIDE	1	η up (%)	1.2	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	98.8	CIBSE SHR MAX	1.00	

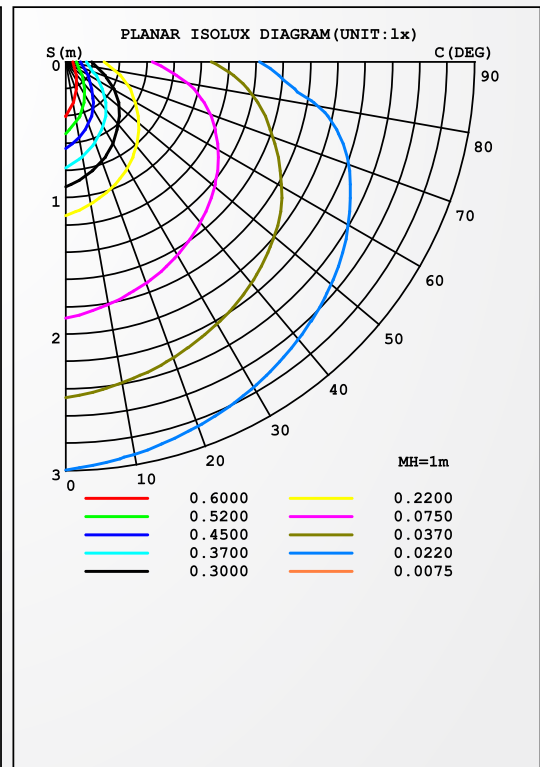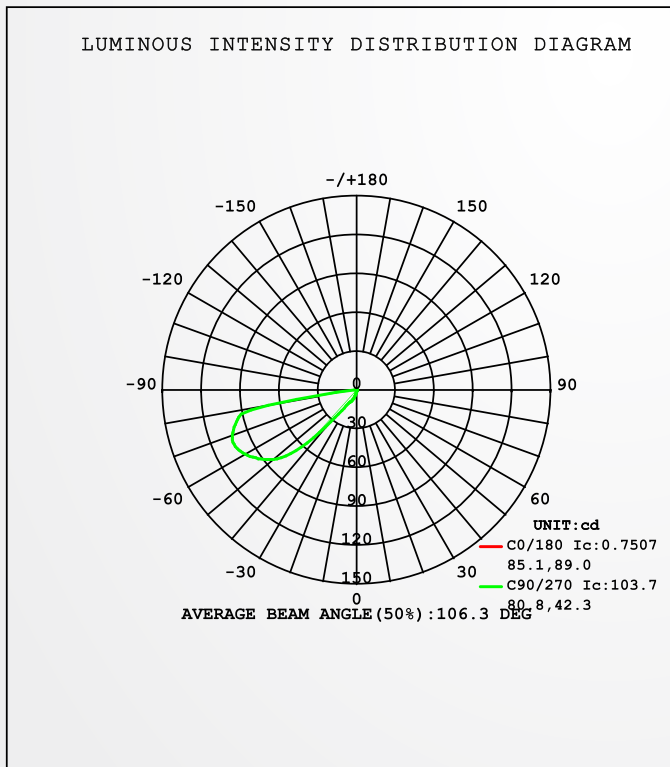

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 20 July 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.366
 Humidity: 60%
 Test Distance: 7.630m [K=1.0000]
 Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS




3W

AAI FIGURE

Test:U:230.35V I:0.025A P:3.08W PF:0.5432 Freq:49.99Hz Lamp Flux:94.8153x1 lm		
NAME: LED WALL LIGHT	TYPE:LED	WEIGHT:
SPEC.: NX-WL6Y-1606L-BK-3W-30K	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

Flux out:0.5469 lm

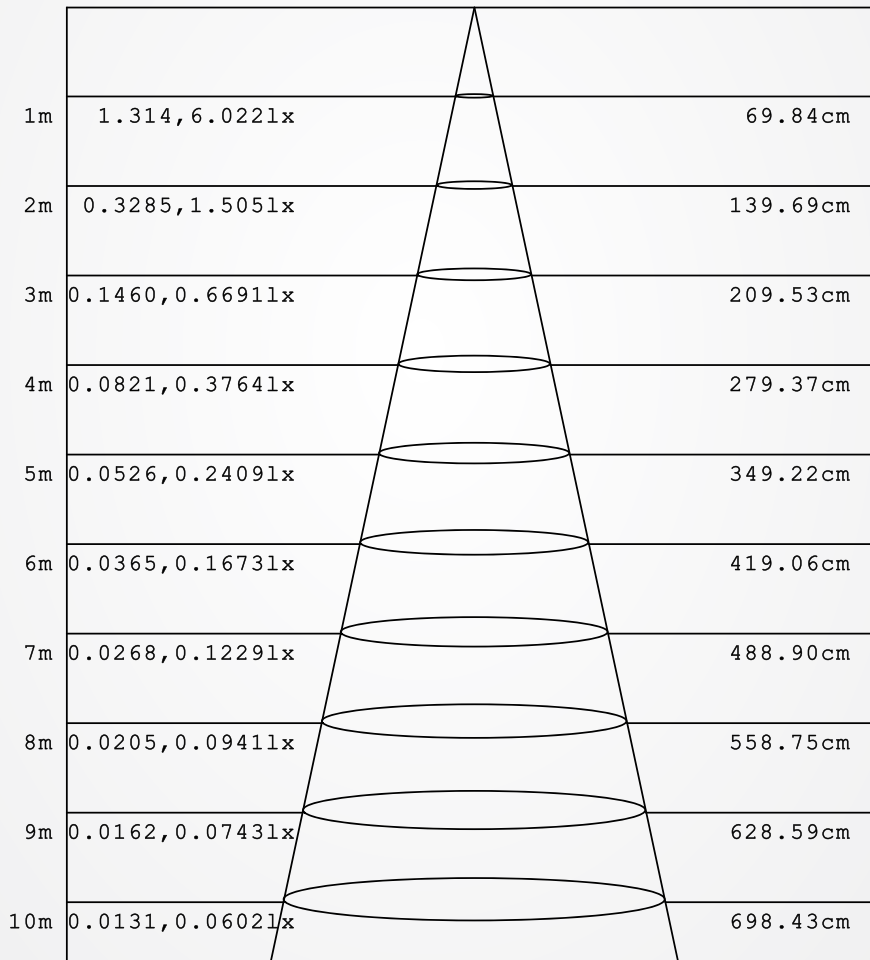

Height Eavg, Emax Angle:38.50deg Diameter

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:20 July 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:60%
Test Distance:7.630m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS