


3 YEARS
WARRANTY


3 CCT CHANGEABLE

Flip switch to change CCT

6500K 4000K 3000K

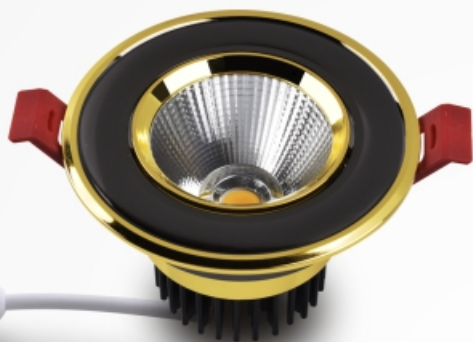

GUN METAL+GOLD

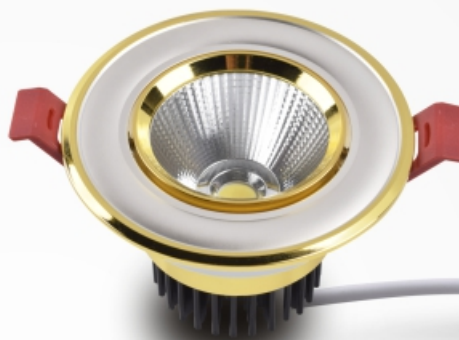

IVORY SILVER+GOLD

Video



ZM007-3CCT

5W / 15W / 20W

specification

PRODUCT NAME :	LED DOWNLIGHT
MODEL NO. :	ZM007-3CCT 5W/15W/20W
SPECIFICATION :	AC220-240V, 50-60Hz , 5W/15W/20W
WORKING TEMP :	-20-50(°C)
POWER FACTOR :	>0.6
CRI(RA) :	>80
LIGHT SOURCE :	Gun Metal+Gold/Ivory Silver+Gold
LUMEN :	COB Chip
BEAM ANGLE :	85 LM/W
ADJUSTABLE ANGLE:	24°
PRODUCT SIZE :	90*60mm/110*85mm/140*95mm
CUTOUT :	75mm/100mm/125mm
IP :	IP20
APPLICATION :	Home, Shop, Hotel, Corridor..etc
WARRANTY :	3 years
STANDARD :	CE

Color Temperature:

6500K - 4000K - 3000K Changeable





LUMINAIRE PHOTOMETRIC TEST REPORT



NAME: ZM007-3CCT LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	ZM007-3CCT 5W	Imax (cd)	1472	S/MH (C0/180)	0.33
NOMINAL POWER (W)	5	LOR (%)	100.0	S/MH (C90/270)	0.36
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	435.64	η UP, DN (C0-180)	2.0, 48.6
NOMINAL FLUX (lm)	435.64	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.1, 48.3
LAMPS INSIDE	1	η up (%)	3.1	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	219.5	η down (%)	96.9	CIBSE SHR MAX	1.00

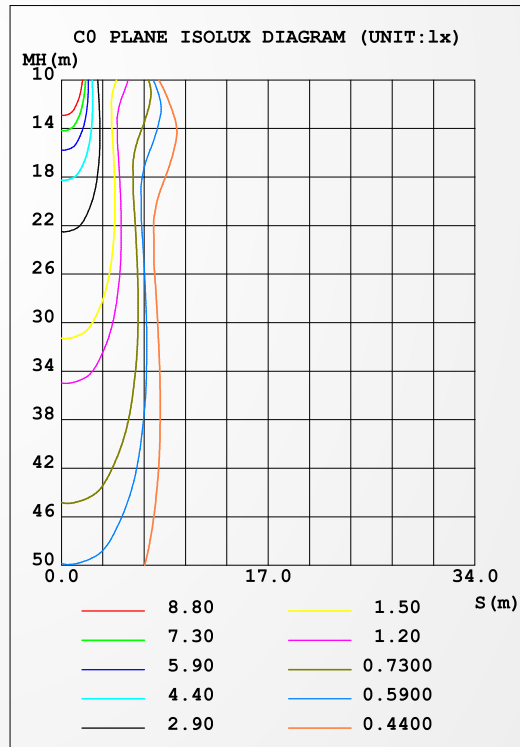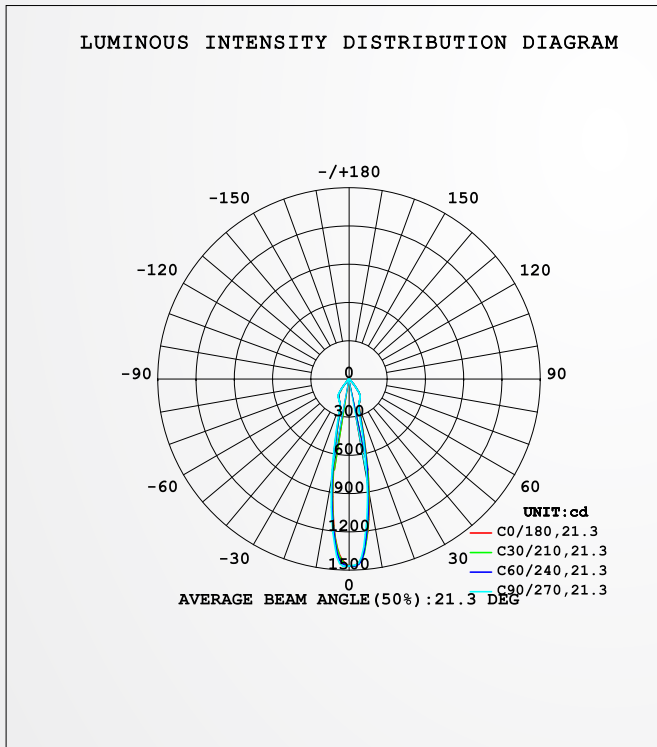

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: JACK
Test Date: 2019-07-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 65.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +



NEXTLITE PRODUCTS

LUMINAIRE PHOTOMETRIC TEST REPORT



NAME: ZM007-3CCT LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	ZM007-3CCT 15W	Imax (cd)	3740	S/MH (C0/180)	0.42
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.45
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1265.6	η UP, DN (C0-180)	2.0, 45.8
NOMINAL FLUX (lm)	1265.57	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.2, 50.9
LAMPS INSIDE	1	η up (%)	3.2	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	219.5	η down (%)	96.8	CIBSE SHR MAX	1.00

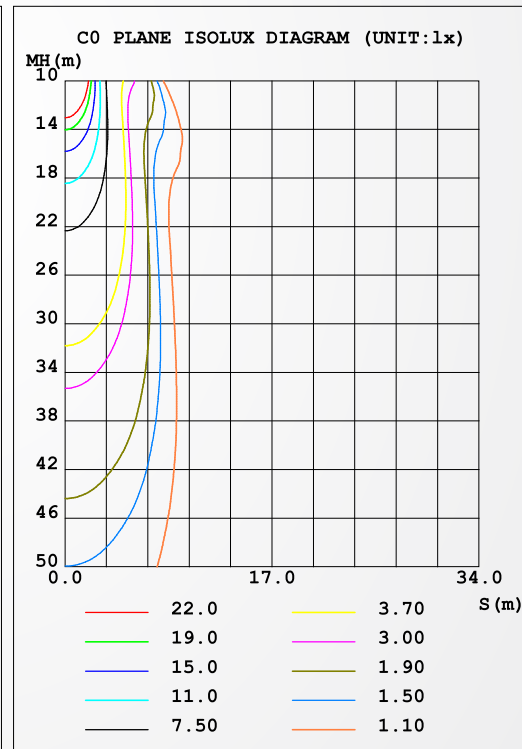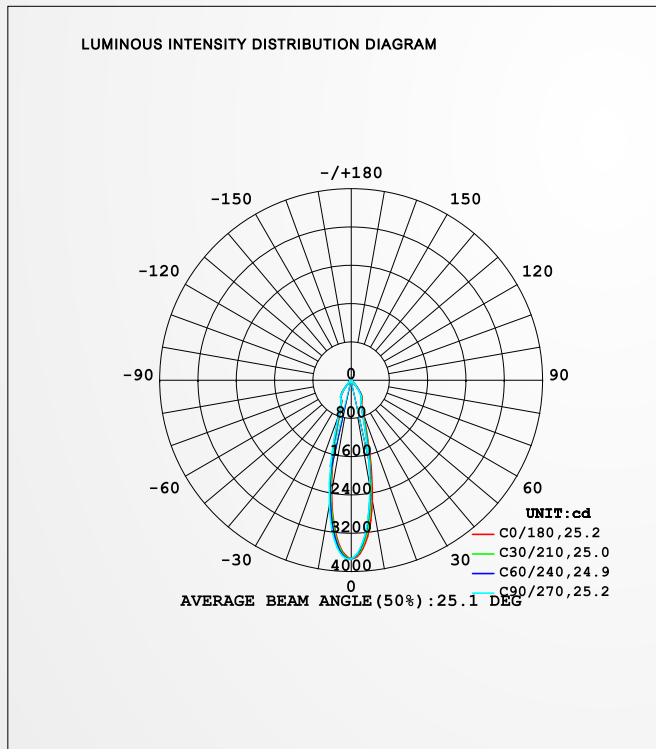

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: JACK
Test Date: 2019-07-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 65.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR FACEBOOK PAGE +



NEXTLITE PRODUCTS

LUMINAIRE PHOTOMETRIC TEST REPORT



NAME: ZM007-3CCT LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 85.15 lm/W
MODEL	ZM007-3CCT 20W	Imax (cd)	5290	S/MH (C0/180)	0.35	
NOMINAL POWER (W)	20	LOR (%)	100.0	S/MH (C90/270)	0.40	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1638.1	η UP, DN (C0-180)	2.1, 42.9	
NOMINAL FLUX (lm)	1638.14	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.2, 53.8	
LAMPS INSIDE	1	η up (%)	3.3	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	219.5	η down (%)	96.7	CIBSE SHR MAX	1.00	

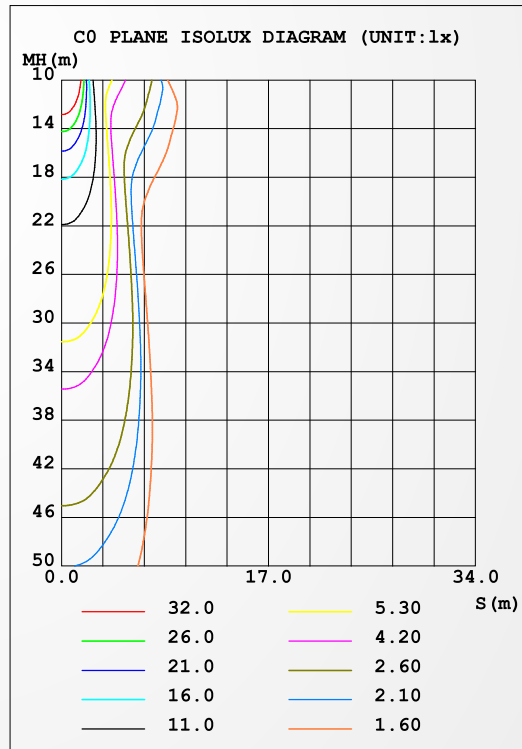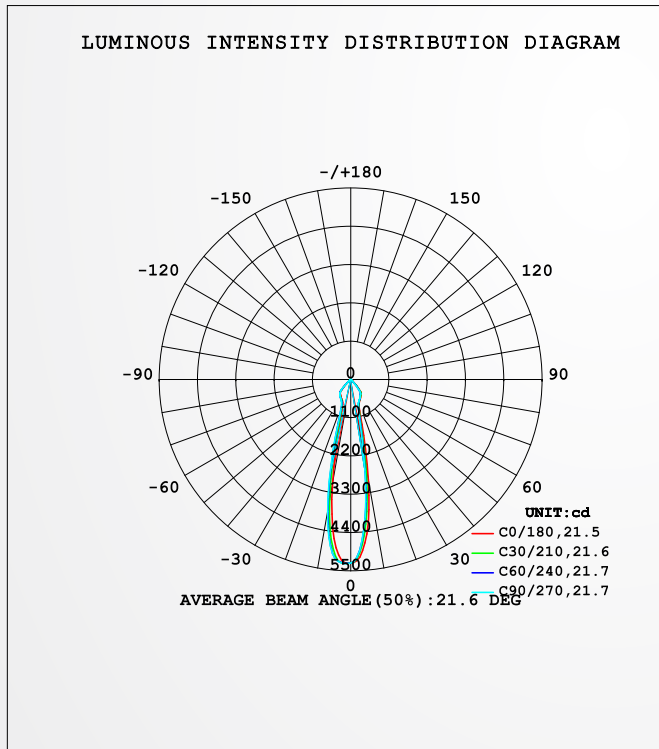

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 27.3DEG
Operators: JACK
Test Date: 2019-07-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 65.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS