


**3 YEARS**  
WARRANTY

**IP65**



Video

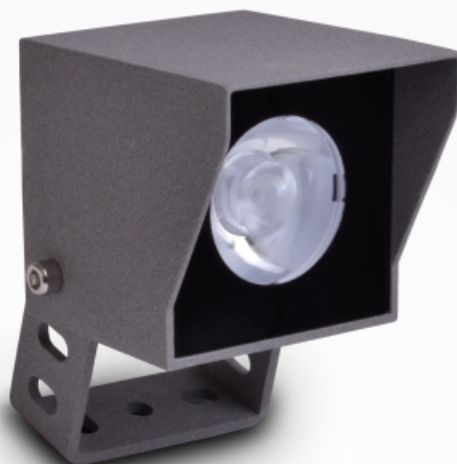

**FL15**

LED Flood Light

**3W**

**specification**

PRODUCT NAME :	LED FLOOD LIGHT
MODEL NO. :	FL015 3W
SPECIFICATION :	AC220-240V, 50-60Hz, 3W
WORKING TEMP :	-20-50(°C)
POWER FACTOR :	>0.6
CRI(RA) :	>80
COLOR :	GRAY
LIGHT SOURCE :	SMD
LUMEN :	80 LM/W
BEAM ANGLE :	10°
PRODUCT SIZE :	65*65*105mm
IP :	IP65
APPLICATION :	Garden, villa, commercial building..etc.
WARRANTY :	3 years
STANDARD :	CE

**Color Temperature:**

**6500K / 4000K / 3000K / Red / Greed / Green**





# 3W

## LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: F1015 LED Flood Light	TYPE:	WEIGHT:
SPEC.: 3W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 3.5	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 57.29 lm/W
MODEL	FL015 3W	I <sub>max</sub> (cd)	6624	S/MH (C0/180)	0.08	
NOMINAL POWER (W)	3	LOR (%)	100.0	S/MH (C90/270)	0.14	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	139.51	η UP, DN (C0-180)	1.7, 35.1	
NOMINAL FLUX (lm)	139.515	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.8, 62.3	
LAMPS INSIDE	1	η up (%)	2.6	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	220	η down (%)	97.4	CIBSE SHR MAX	1.00	

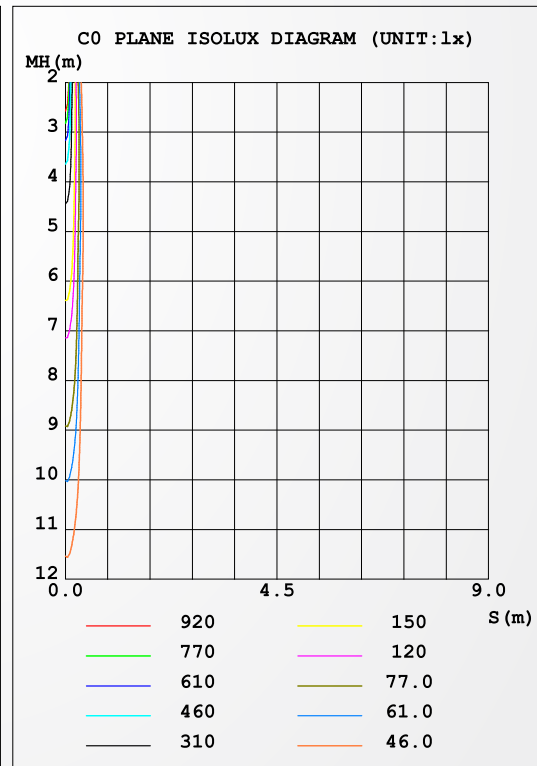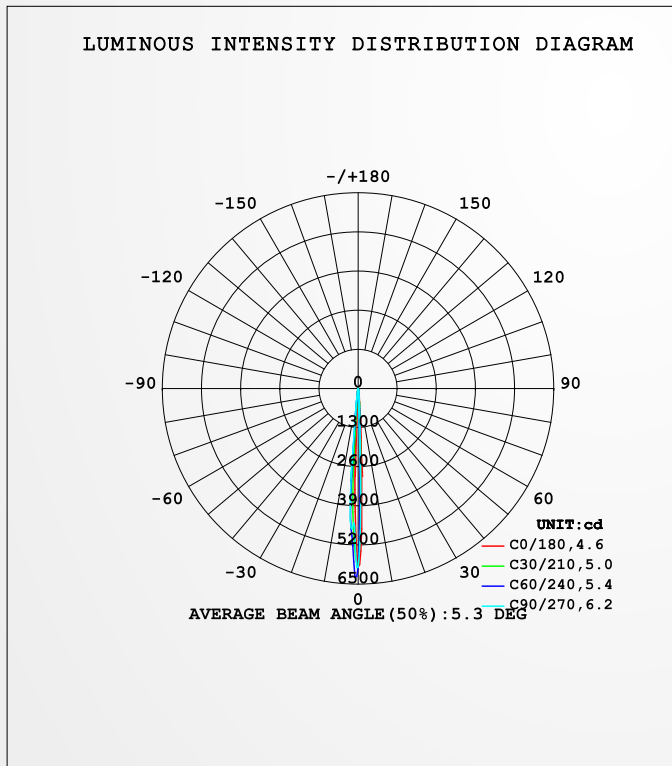

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: MEDIUM  
Temperature: 28DEG  
Operators: JACK  
Test Date: 2022-01-05

γ Range: 0 - 180DEG  
γ Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.407.13  
Humidity: 63.0%  
Test Distance: 11.565m [K=1.0000]  
Remarks:



JOIN US ON OUR FACEBOOK PAGE +

NEXTLITE PRODUCTS




# 3W

## AAI FIGURE

NAME: F1015 LED Flood Light	TYPE:	WEIGHT:
SPEC.: 3W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.: 3.5	Shielding Angle:

Flux out: 25.52 lm

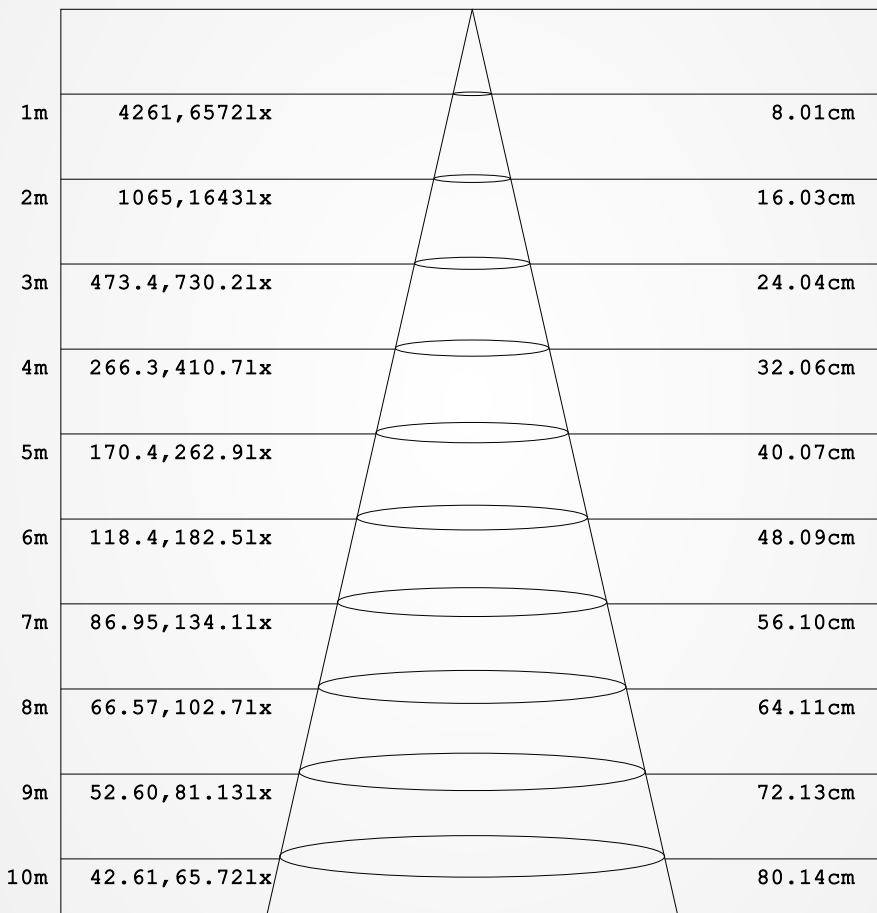

Height                      Eavg, Emax                      Angle: 4.59deg                      Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: MEDIUM  
Temperature: 28DEG  
Operators: JACK  
Test Date: 2022-01-05

γ Range: 0 - 180DEG  
γ Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.407.13  
Humidity: 63.0%  
Test Distance: 11.565m [K=1.0000]  
Remarks:



JOIN US ON OUR FACEBOOK PAGE +

NEXTLITE PRODUCTS