



3CCT CHANGEABLE



VIDEO



**3CCT
LED Ceiling Light**

20W

specification

Product Name :	3CCT LED CEILING LIGHT
Model NO. :	NX-CLR-A-0307B-20W-3CCT
Specification :	AC220-240V, 50/60Hz, 147mA, 20W
Working Temp :	-10~40(°C)
Power Factor :	0.5
CRI(ra) :	80
Body Color :	White
Light Source :	LED SMD Chip
Lumen :	100LM/W
Life Time :	25000 hrs
Beam Angle :	120°
Product Size :	Φ200*53mm
IP :	IP20
Application :	Home, Shop, Hotel...etc
Warranty :	2 years
Standard :	CE

Color Temperature:

3000K -4000K- 6500K 3CCT Changeable



NEXTLITE PRODUCTS







20W

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.37V I:0.147A P:19.24W PF:0.5696 Freq:49.99Hz Lamp Flux:2202.63x1 lm		
NAME: 3CCT LED CEILING LIGHT	TYPE:LED	WEIGHT:
SPEC.: NX-CLR-A-0307B-20W-3CCT	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	NX-CLR-A-0307B-20W-3CCT	Imax (cd)	592.0	S/MH (C0/180)	1.31
NOMINAL POWER (W)	20	LOR (%)	100.0	S/MH (C90/270)	1.31
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	2202.6	η UP, DN (C0-180)	5.5, 44.5
NOMINAL FLUX (lm)	2202.63	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	5.4, 44.6
LAMPS INSIDE	1	η up (%)	10.9	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	230	η down (%)	89.1	CIBSE SHR MAX	1.50

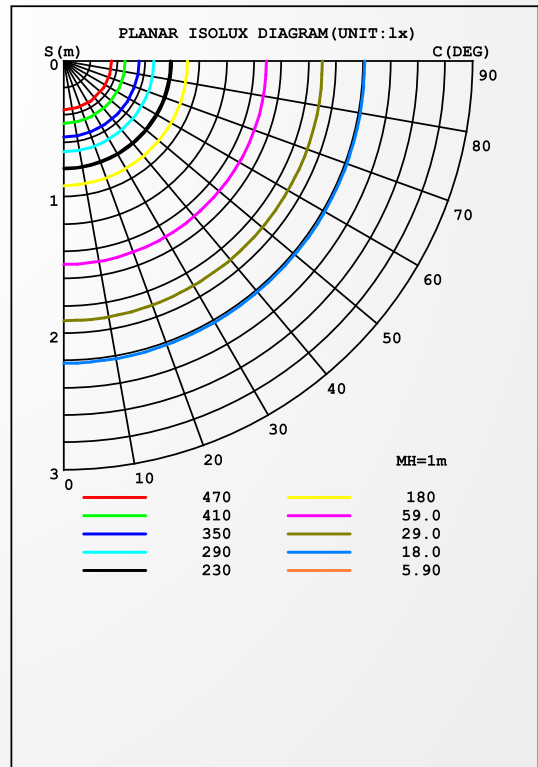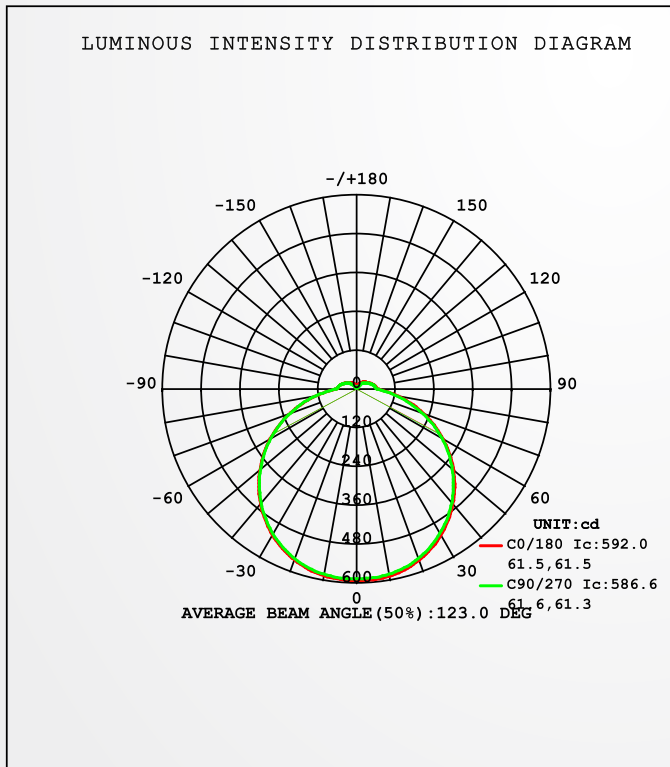

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 26 July 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity: 60%
Test Distance: 7.710m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS




20W

AAI FIGURE

Test:U:230.37V I:0.147A P:19.24W PF:0.5696 Freq:49.99Hz Lamp Flux:2202.63x1 lm		
NAME: 3CCT LED CEILING LIGHT	TYPE:LED	WEIGHT:
SPEC.: NX-CLR-A-0307B-20W-3CCT	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

Flux out:1476 lm

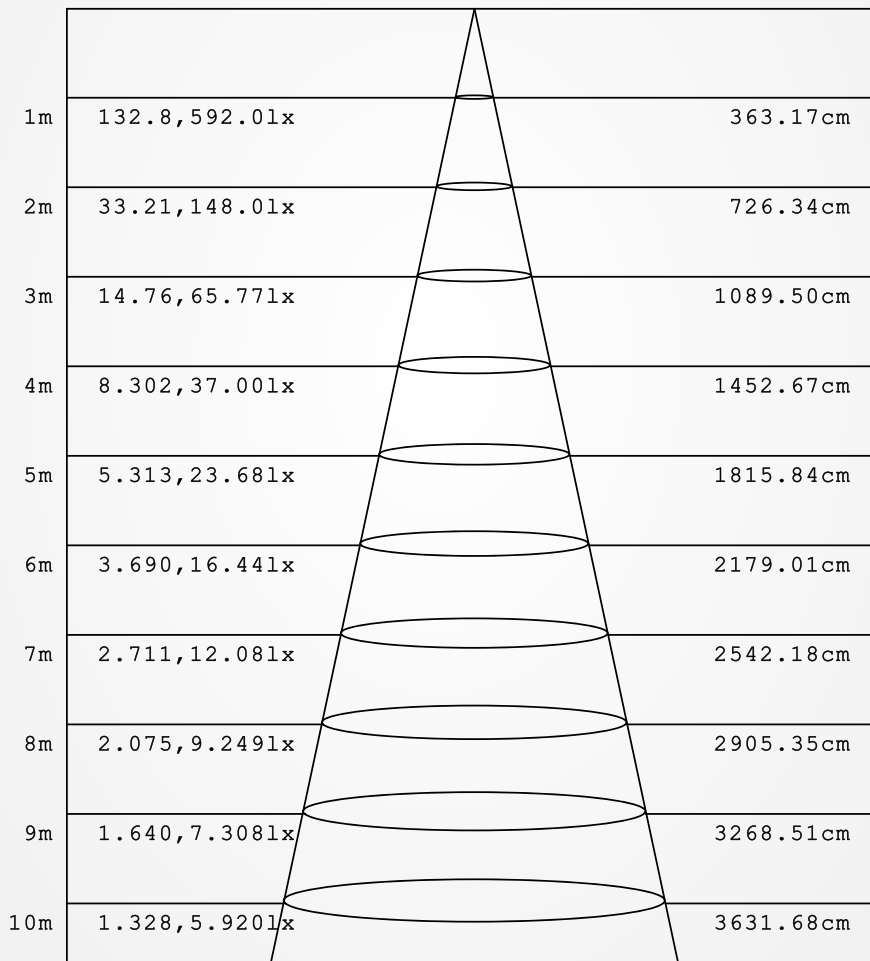

Height Eavg, Emax Angle:122.32deg Diameter

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:26 July 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.366
Humidity:60%
Test Distance:7.710m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS