



**3CCT**  
Changeable

3000K 4000K 6500K



**VIDEO**



**LED Track Light**

**30W**

### specification

|                    |                               |
|--------------------|-------------------------------|
| Product Name :     | 3CCT LED Track Light          |
| Model No. :        | NXTL01-BK-CCT / NXTL01-WH-CCT |
| Specification :    | AC175-265V,50Hz ,140mA,30W    |
| Working Temp :     | -20~45(°C)                    |
| Power Factor :     | 0.9                           |
| CRI(ra) :          | 90                            |
| Housing Color :    | Black / White                 |
| Light Source :     | COB 30W                       |
| Lumen :            | 2500 LM                       |
| Track System:      | 2 Wires                       |
| Life Time :        | 25000 hrs                     |
| Beam Angle :       | 24°±4°                        |
| Adjustable Angle : | 0~90°                         |
| Product Size :     | Φ75*168mm                     |
| IP :               | IP20                          |
| Application :      | Home, Shop, Hotel...etc       |
| Warranty :         | 3 years                       |
| Standard :         | CE                            |

**Color Temperature:**

**6500K-4000K-3000K Changeable**



NEXTLITE PRODUCTS






# 30W

## LUMINAIRE PHOTOMETRIC TEST REPORT


|                            |                 |                  |
|----------------------------|-----------------|------------------|
| NAME: 3CCT LED TRACK LIGHT | TYPE: 30W-4000K | WEIGHT:          |
| SPEC.: 30W                 | DIM.:           | SERIAL No.:      |
| MFR.: NEXLEDS              | SUR.:           | Shielding Angle: |

| DATA OF LAMP      |               | PHOTOMETRIC DATA |        |                     |           |
|-------------------|---------------|------------------|--------|---------------------|-----------|
| MODEL             | NXTL01-BK-CCT | Imax (cd)        | 8733   | S/MH (C0/180)       | 0.47      |
| NOMINAL POWER (W) | 30            | LOR (%)          | 100.0  | S/MH (C90/270)      | 0.41      |
| RATED VOLTAGE (V) | 220           | TOTAL FLUX (lm)  | 2366.9 | η UP, DN (C0-180)   | 0.0, 50.5 |
| NOMINAL FLUX (lm) | 2366.94       | CIE CLASS        | DIRECT | η UP, DN (C180-360) | 0.0, 49.5 |
| LAMPS INSIDE      | 1             | η up (%)         | 0.0    | CIBSE SHR NOM       | 0.00      |
| TEST VOLTAGE (V)  | 220           | η down (%)       | 100.0  | CIBSE SHR MAX       | 0.30      |

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

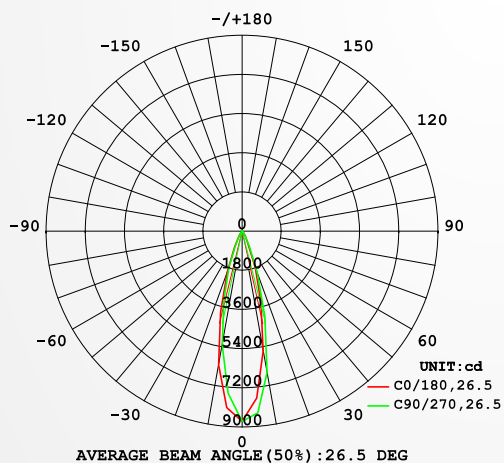

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

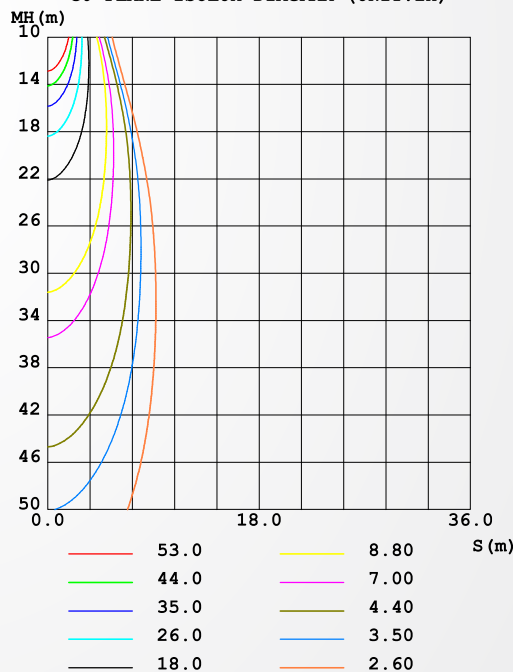

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: 01  
Test Date: 2025-07-24

γ Range: 0 - 90DEG  
γ Interval: 5.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
Humidity: 65.0%  
Test Distance: 10.000m [K=1.0000]  
Remarks:




# 30W

## AAI FIGURE

|                            |                 |                  |
|----------------------------|-----------------|------------------|
| NAME: 3CCT LED TRACK LIGHT | TYPE: 30W-4000K | WEIGHT:          |
| SPEC.: 30W                 | DIM.:           | SERIAL No.:      |
| MFR.: NEXLEDS              | SUR.:           | Shielding Angle: |

Flux out:1263 lm

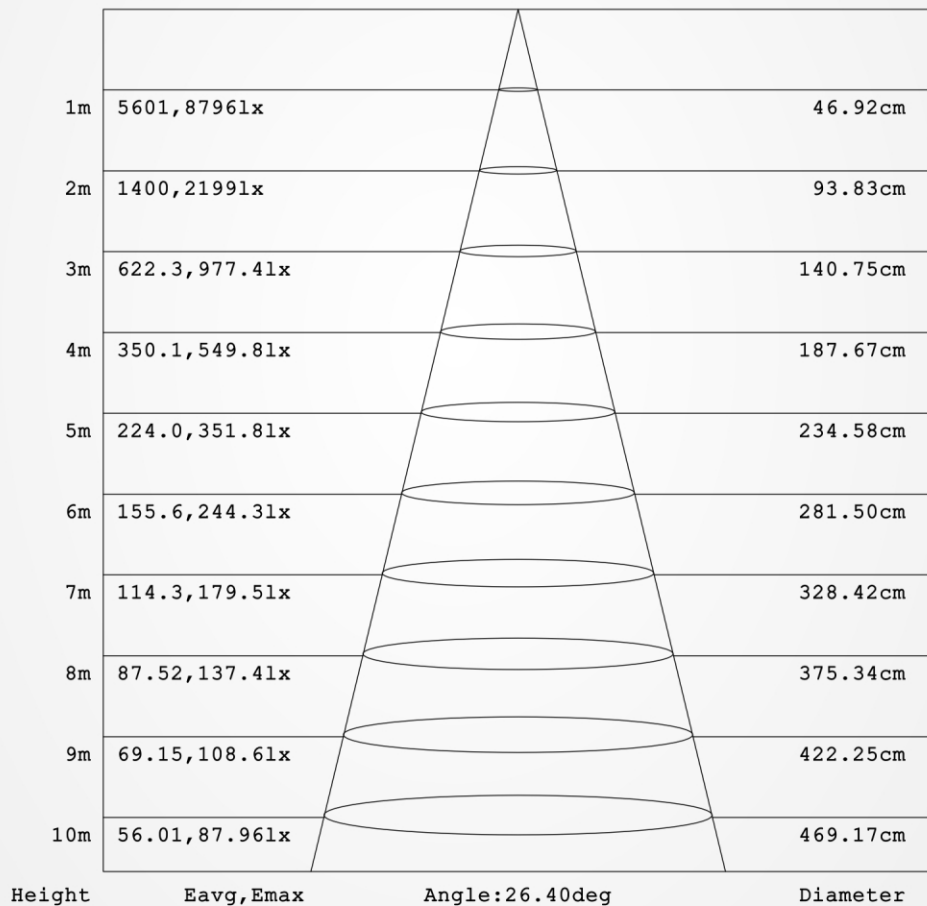

**Note:**The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:01  
Test Date:2025-07-24

γ Range: 0 - 90DEG  
γ Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
Humidity:65.0%  
Test Distance:10.000m [K=1.0000]  
Remarks:



JOIN US ON OUR  
FACEBOOK PAGE +

NEXTLITE PRODUCTS