

3 YEARS
WARRANTY

3 CCT
CHANGEABLE



DL77



DL77-P

VIDEO



DL77, DL77-P
LED Downlight

10W

specification

PRODUCT NAME :	LED DOWNLIGHT
MODEL NO. :	DL77/DL77-P 10W
SPECIFICATION :	AC220-240V, 50-60Hz, 10W
WORKING TEMP :	-20~50(°C)
POWER FACTOR :	>0.6
CRI(RA) :	>80
COLOR :	White/Black
LIGHT SOURCE :	SMD
LUMEN :	80LM/W
BEAM ANGLE :	80°
PRODUCT SIZE :	80*100mm(Wire:1.5m)
IP :	IP20
APPLICATION :	Home, shop, hotel..etc.
WARRANTY :	3 years
STANDARD :	CE

Color Temperature:

6500K - 4000K - 3000K Changeable




10W

LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LED DOWNLIGHT	TYPE:	WEIGHT:0.4
SPEC.: DL77 10W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 28.26 lm/W
MODEL	DL77 10W	Imax (cd)	116.0	S/MH (C0/180)	1.02	
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	1.04	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	251.74	η UP, DN (C0-180)	4.7, 45.2	
NOMINAL FLUX (lm)	251.713	CIE CLASS	DIRECT	η UP, DN (C180-360)	4.2, 45.9	
LAMPS INSIDE	1	η up (%)	8.9	CIBSE SHR NOM	1.00	
TEST VOLTAGE (V)	220	η down (%)	91.1	CIBSE SHR MAX	1.15	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

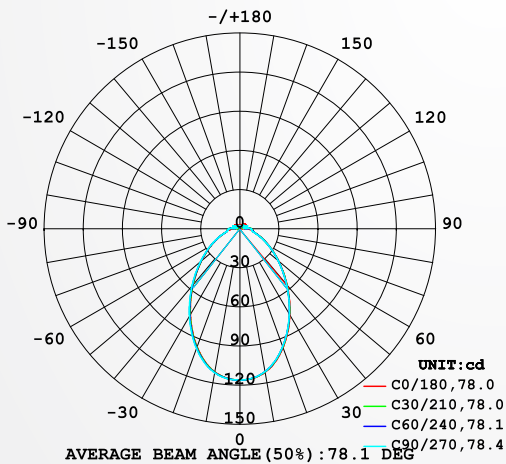

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

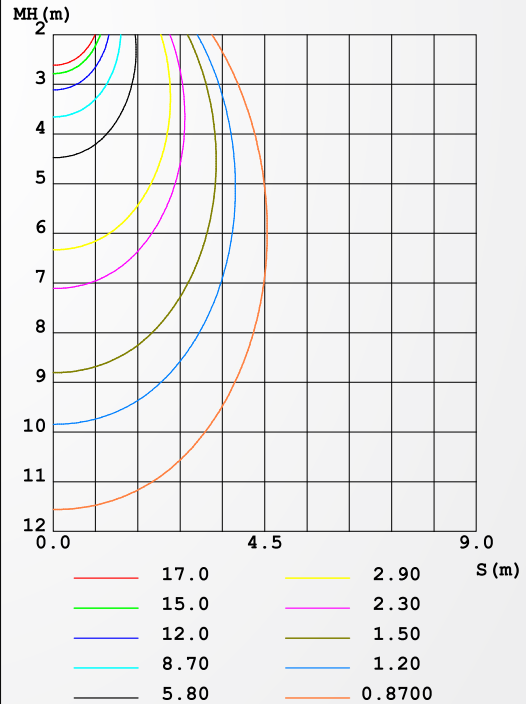

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators: JACK
Test Date: 2022-06-17

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 63.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR FACEBOOK PAGE +

NEXTLITE PRODUCTS




10W

AAI FIGURE

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:0.4
SPEC.: DL77 10W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:70mm	Shielding Angle:

Flux out:119.7 lm

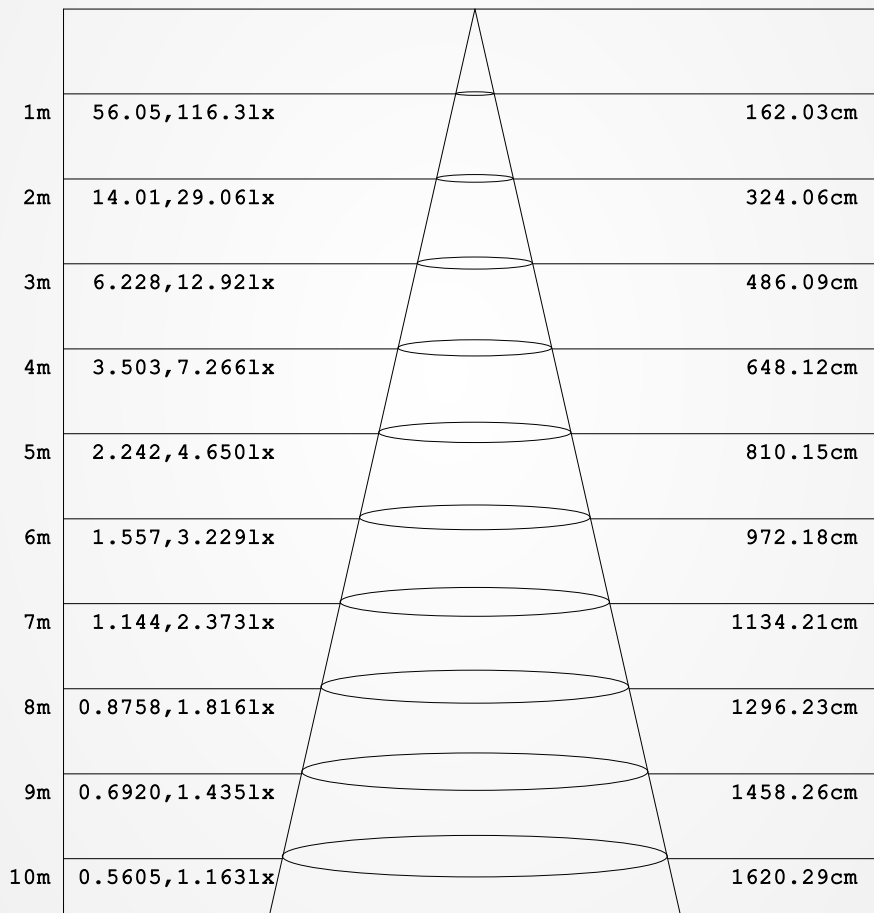

Height Eavg, Emax Angle:78.03deg Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators: JACK
Test Date: 2022-06-17

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 63.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXLITE PRODUCTS