

2 YEARS
WARRANTY

3 CCT
CHANGEABLE
On and off wall switch to change 3 CCT

6500K 4000K 3000K



VIDEO



LED DOWNLIGHT
NXZ9.5B / NXZ9.5W

9.5W

specification

PRODUCT NAME :	LED Downlight
MODEL NO. :	NXZ9.5B / NXZ9.5W
SPECIFICATION :	AC100-240V, 50/60Hz, 209mA, 9.5W
WORKING TEMP :	-20~40(°C)
POWER FACTOR :	0.5
CRI(RA) :	≥80
COLOR :	Black Color / White Color
LIGHT SOURCE :	SMD
LUMEN :	850 lm
LIFE TIME :	30,000 hrs
BEAM ANGLE :	100°
PRODUCT SIZE :	Φ 115mm * 58mm
CUT OUT :	90mm
IP :	IP20
APPLICATION :	Home, Shop, Hotel...etc
WARRANTY :	2 years
STANDARD :	CE

Color Temperature:

6500K-4000K-3000K Changeable




9.5W

LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LED Downlight	TYPE:	WEIGHT:
SPEC.: 9.5W	DIM.:	SERIAL No.: G23011810-6500K1
MFR.: NEXLEDS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	NXZ9.5B	Imax (cd)	393.6	S/MH (C0/180)	1.21
NOMINAL POWER (W)	9.5W	LOR (%)	100.0	S/MH (C90/270)	1.17
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1028.6	η UP, DN (C0-180)	0.1, 51.2
NOMINAL FLUX (lm)	1028.6	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 48.5
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	99.7	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

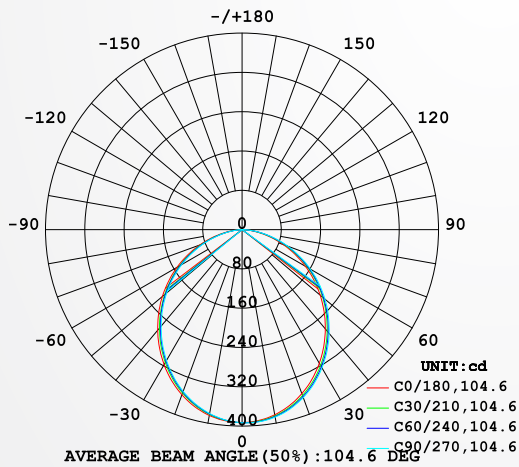

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

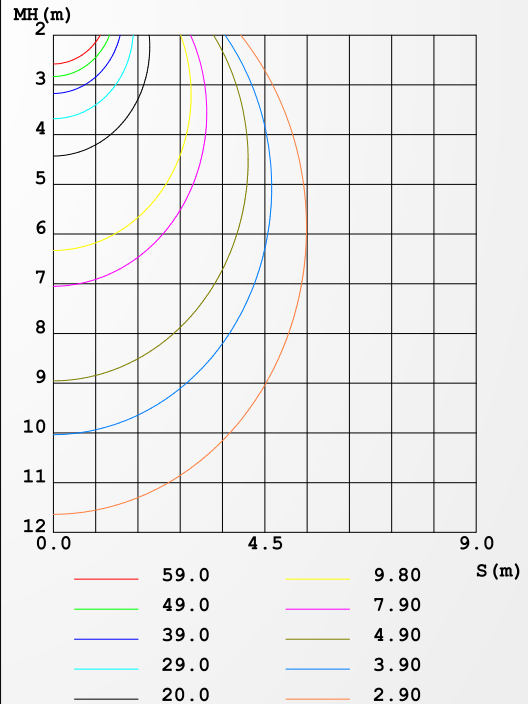

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: NEXLEDS
 Test Date: 2023-01-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.030m [K=1.0000]
 Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS