

**3 YEARS**  
WARRANTY



SNOW MOON VIDEO



**SNOW**  
**MOON**

**specification**

|                |  |
|----------------|--|
| Product Name:  | SNOW MOON DOWNLIGHT                      |
| Model NO.:     | COB42                                    |
| Specification: | AC100-240V, 50-60Hz, 840MA,15W-20W-30W   |
| Working Temp:  | -20-50(°C)                               |
| Power Factor:  | >0.6                                     |
| CRI(ra):       | >80                                      |
| Color:         | White                                    |
| Light Source:  | COB Chip                                 |
| Lumen:         | 100 lm/W                                 |
| Beam Angle:    | 100°                                     |
| Product Size:  | 163*50 mm , 194*50 mm , 225*50 mm        |
| Cut Out:       | 145mm , 175mm , 200 mm                   |
| IP:            | IP20                                     |
| Application:   | Home, Shop, Hotel, Exhibition hall.. etc |
| Warranty:      | 3 years                                  |
| Standard:      | CE                                       |

**Color Temperature:**

**6500K / 4000K / 3000K**



NEXTLITE PRODUCTS





# LUMINAIRE PHOTOMETRIC TEST REPORT



|                           |           |                  |
|---------------------------|-----------|------------------|
| NAME: SNOW MOON DOWNLIGHT | TYPE: COB | WEIGHT:          |
| SPEC.:                    | DIM.:     | SERIAL No.:      |
| MFR.: NEXLEDS             | SUR.:     | Shielding Angle: |

| DATA OF LAMP      |         | PHOTOMETRIC DATA |        |                     |           |
|-------------------|---------|------------------|--------|---------------------|-----------|
| MODEL             | COB42   | Imax (cd)        | 864.7  | S/MH (C0/180)       | 1.22      |
| NOMINAL POWER (W) | 30      | LOR (%)          | 100.0  | S/MH (C90/270)      | 1.23      |
| RATED VOLTAGE (V) | 220     | TOTAL FLUX (lm)  | 2139.8 | η UP, DN (C0-180)   | 0.0, 50.0 |
| NOMINAL FLUX (lm) | 2139.81 | CIE CLASS        | DIRECT | η UP, DN (C180-360) | 0.0, 50.0 |
| LAMPS INSIDE      | 1       | η up (%)         | 0.0    | CIBSE SHR NOM       | 1.25      |
| TEST VOLTAGE (V)  | 220.0   | η down (%)       | 100.0  | CIBSE SHR MAX       | 1.30      |

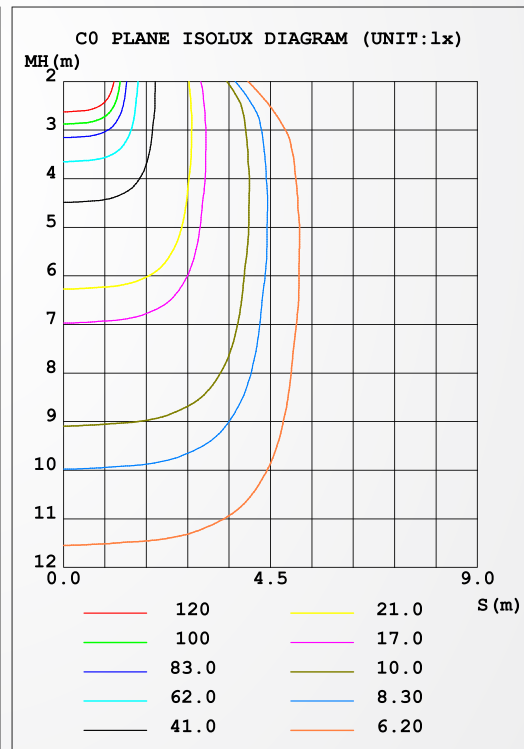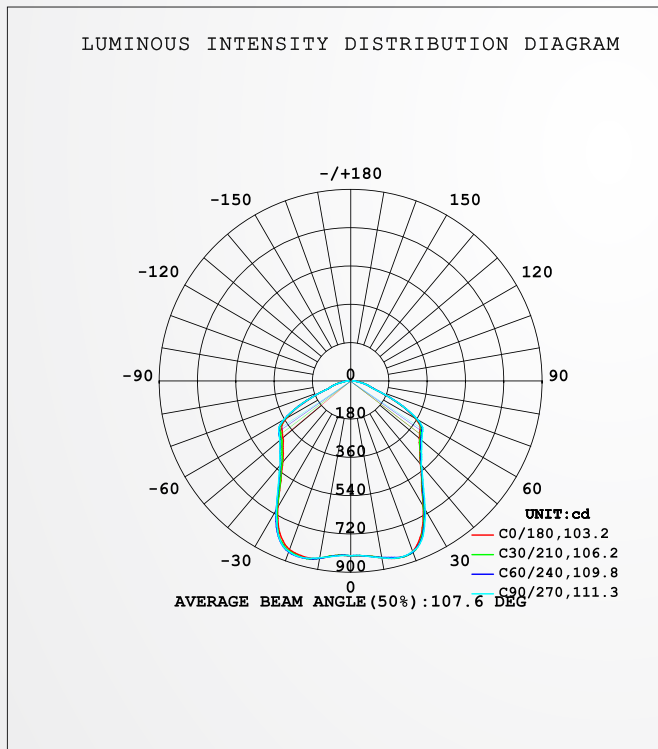

C Range: 0 - 180DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: JACK  
Test Date: 2019-04-26

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.407.13  
Humidity: 65.0%  
Test Distance: 11.565m [K=1.0000]  
Remarks:



JOIN US ON OUR FACEBOOK PAGE +

NEXTLITE PRODUCTS