


Industrial LIGHTING



2023
CATALOGUE

LED STREET LIGHT ST-003

VIDEO

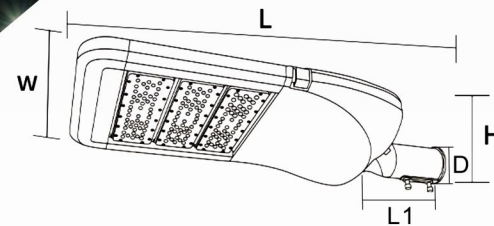

ST-003 150W



L: 721mm
W: 350mm
H: 135mm
D: 62mm
L1:116mm

Weight: 5.5KGS

ST-003 200W



L: 804mm
W: 350mm
H: 135mm
D: 62mm
L1:116mm

Weight: 6.4KGS


ST-003 250W



L: 887mm
W: 350mm
H: 135mm
D: 62mm
L1:116mm

Weight: 7.2KGS

LED STREET LIGHT ST-003



150W




200W



250W

Color Temperature:



LED STREET LIGHT


SPECIFICATION :	AC220-240V, 50-60Hz, 150W/ 200W/ 300W
WORKING TEMP :	-20~+50(°C)
POWER FACTOR :	>0.95
CRI(RA) :	>80
COLOR :	Gray
DRIVER	MOSO / PHILIPS / MEANWELL / SOSEN
LIGHT SOURCE :	Bridgelux 5050
LUMEN :	170-190 LM/W
BEAM ANGLE :	70°*140°
PRODUCT SIZE :	721*350*135mm/ 804*350*135mm/ 887*350*135mm
IP :	IP67
MATERIAL	Aluminum
WORKING TIME	50.000 hrs
FIRE RESISTANT(WIRES):	105°
THICKNESS(HEAT SINK):	2mm
SURGE PROTECTION DEVICE:	10kv 
APPLICATION :	Garden, Park, Street, Plazas..etc.
WARRANTY :	5 years
STANDARD :	CE
OTHERS :	Ta: 60° Tc:90°

MODEL NO. :

ST-003 150W / ST-003 200W / ST-003 250W



Light Sensor(Optional) Gradienter Latches Radiator

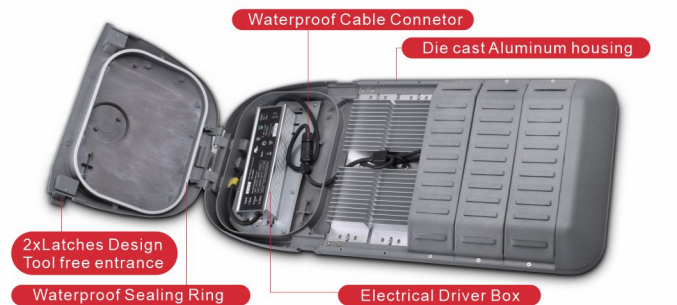

Waterproof Cable Connector Die cast Aluminum housing 2xLatches Design Tool free entrance Waterproof Sealing Ring Electrical Driver Box

LED STREET LIGHT ST-002

VIDEO



IP67

IP

5 Year

Warranty

100°

Beam Angle

50000 hrs

Life Time

>0.95

Power Factor

165 LM/W

Lumen

Color Temperature:

3000K

4000K

6500K

MODEL NO. :

ST-002 100W / ST-002 150W / ST-002 200W / ST-002 250W

100W / 150W / 200W / 250W



LED STREET LIGHT

SPECIFICATION :	AC220-240V, 50-60H,100W/150W/200W/250W
WORKING TEMP :	-20~+50(°C)
FIRE RESISTANT	
(WIRE):	105° Ta:60° Tc: 90°
POWER FACTOR :	>0.95
CRI(RA) :	>80
COLOR :	Black
DRIVER :	Done Driver DL-50W1A5-MP
LIGHT SOURCE :	3030 12B5C
LUMEN :	165 LM/W
LIFE TIME:	50,000hrs
BEAM ANGLE :	100°
PRODUCT SIZE :	484*211*83mm/580*242*83mm/685*300*106mm
IP :	IP67
MATERIAL :	Aluminum Body and Powder costing
APPLICATION :	Garden, Park, Street, Plaza, Campus..etc
WARRANTY :	5 years
STANDARD :	CE

LED COURT LIGHT CORL02

VIDEO



IP66

IP

5 Year

Warranty

50°

Beam Angle

50000 hrs

Life Time

>0.95

Power Factor

130 LM/W

Lumen



Color Temperature:

3000K

4000K

6500K

LED COURT LIGHT

SPECIFICATION :	AC120-277V, 50-60Hz, 750W
WIRES FIRE RESISTANT:	>105°C, Ta: 50°, Tc: 90°
WORKING TEMP :	-20~+50(°C)
POWER FACTOR :	>0.95
CRI(RA) :	>80
COLOR :	Black
Driver	Meanwell
LIGHT SOURCE :	Philips 5050 chip
LUMEN :	130 LM/W
BEAM ANGLE :	50°
PRODUCT SIZE :	φ535*177*618mm
IP :	IP66
APPLICATION :	Parking lot, Garden, Plaza, Playground..etc.
WARRANTY :	5 years
STANDARD :	CE

MODEL NO. :

CORL02 750W

750W



LED FLOOD LIGHT NX-FLA-YWT

IP66

IP

5 Year

Warranty

30°/60°
90°/120°

Beam Angle

50000 hrs

Life Time

>0.95

Power Factor

130 LM/W

Lumen

VIDEO



Changeable Color Temperature

30°/60°/90°/ 120°
Beam Angle

CE RoHS
3CCT Changeable



LED FLOOD LIGHT

MODEL NO. :	NX-FLA-YWT-20W-3CCT		NX-FLA-YWT-30W-3CCT		NX-FLA-YWT-50W-3CCT		NX-FLA-YWT-100W-3CCT	
	NX-FLA-YWT-150W-3CCT		NX-FLA-YWT-200W-3CCT		NX-FLA-YWT-300W-3CCT		NX-FLA-YWT-400W-3CCT	
SPECIFICATION :	AC100-277V, 50/60Hz ;							
	100mA,20W	150mA,30W	250mA,50W	500mA,100W	750mA,150W	1000mA,200W	1500mA,300W	2000mA,400W
WORKING TEMP:	-20~+50(°C)							
POWER FACTOR :	0.95							
CRI(RA) :	>80							
COLOR :	Black Color							
LIGHT SOURCE :	Philips 3030 Chip							
LUMEN :	130 lm / W							
LIFE TIME :	50000 hrs							
BEAM ANGLE :	30° / 60° / 90° / 120°							
PRODUCT SIZE :	20W: 182*122*47mm		30W: 242*169*51mm		50W: 288*228*52mm		100W: 364*278*52mm	
	150W: 394*394*56 mm		200W: 445*394*56mm		300W: 497*394*58mm		400W: 524*545*65mm	
NET WEIGHT:	0.80 KGS	1.20 KGS	1.80 KGS	3.40 KGS	5.10 KGS	5.80 KGS	7.80 KGS	10.80 KGS
IP :	IP66							
APPLICATION :	Billboard, Basketball court, Tennis court, etc							
WARRANTY :	5 years							
STANDARD :	CE, ROHS, SAA, C-TICK							

LED FLOOD LIGHT (YOKE) NXSFL

IP65

IP

5 Year

Warranty

90°

Beam Angle

50000 hrs

Life Time

>0.95

Power Factor


120-130 LM/W

Lumen

VIDEO



3CCT Changeable



LED FLOOD LIGHT (YOKE)

SPECIFICATION :	AC120-277V; 50/60Hz; 50W / 100W / 150W
WORKING TEMP :	-40 ~ +45(°C)
POWER FACTOR :	>0.90
CRI(RA) :	>80
COLOR :	Bronze
LUMEN :	6000 LM / 13000 LM / 19500 LM
LIFE TIME :	50000 hrs
BEAM ANGLE :	80x110°
ADJUSTABLE ANGLE :	90°
PRODUCT SIZE :	9.8x7.7x2.3 inch / 13.4x10.9x3.15 inch 15.2x11.48x3.27 inch
IP :	IP65
APPLICATION :	Home, Shop, Hotel, Parking Lot
WARRANTY :	5 years
STANDARD :	cUL, FCC


MODEL NO. :

NXSFL-50W-80x110-Y-3CCT
NXSFL-100W-80x110-Y-3CCT
NXSFL-150W-80x110-Y-3CCT

50W / 100W / 150W



LED FLOOD LIGHT **FL006**



Color Temperature:



MODEL NO. :

FI006 50W / FL006 100W


50W / 100W



LED FLOOD LIGHT

SPECIFICATION :	AC85-265V ; 1500mA ; 50W/100W
WORKING TEMP :	-20~+50(°C)
POWER FACTOR :	>0.95
CRI(RA) :	>80
COLOR :	Black Color / White Color
LIGHT SOURCE :	Epistar 3030 SMD chip
LUMEN :	100 LM /W
LIFE TIME :	30000 hrs
BEAM ANGLE :	60°
PRODUCT SIZE :	238*228*46mm / 290*280*59mm
IP :	IP65
APPLICATION :	Outdoor,plaza,factory,tunnel,highway,court,part ...ect
WARRANTY :	3 years
STANDARD :	CE

LED FLOOD LIGHT **FL016 / FL016-S**



Color Temperature:



LED FLOOD LIGHT

SPECIFICATION :	AC200-240V, 50-60Hz ,150W / 200W
WORKING TEMP :	-20~+50(°C)
POWER FACTOR :	>0.95
CRI(RA) :	>80
COLOR :	Black
LIGHT SOURCE :	SMD Chip
LUMEN :	135 LM/W
LIFE TIME :	30000 hrs
BEAM ANGLE :	120°
PRODUCT SIZE :	295*295*65mm/325*325*65mm
SENSOR MODE :	Motion/Photocell
IP :	IP65
APPLICATION :	Parking Lot, Square, Alley, Garden, Yard etc.
WARRANTY :	3 years
STANDARD :	CE

MODEL NO. :

FL016 150W / FL016 200W
FL016-S 150W / FL016-S 200W

150W / 200W



VIDEO



LED UFO HIGHBAY **NXUHB7**



VIDEO



MODEL NO. :

NXUHB7-100W-DV / NXUHB7-150W-DV
NXUHB7-200W-DV / NXUHB7-240W-DV

100W / 150W / 200W / 240W



Color Temperature:



LED UFO HIGHBAY

SPECIFICATION :	AC120-347V; 100W / 150W / 200W / 240W
WORKING TEMP :	-40~+45(°C)
POWER FACTOR :	>0.90
CRI(RA) :	> 80
COLOR :	Black
LIGHT SOURCE :	2835
LUMEN :	135 LM/W & 150 LM/W
LIFE TIME :	50000 hrs
BEAM ANGLE :	110°
PRODUCT SIZE :	239x239mm / 271x271mm / 306x360mm / 306x360mm
LOCATION:	Wet Location
APPLICATION :	Warehouse Factory,Exhibition Room, Gas Station
WARRANTY :	5 years
STANDARD :	cUL, DLC

3CCT LED UFO HIGHBAY **NXUHB7**



IP Warranty Beam Angle Life Time Power Factor Lumen



VIDEO



3CCT Changeable



3CCT LED UFO HIGHBAY

SPECIFICATION :	AC120-277V ; 50/60Hz; 1375mA; 150W AC120-277V ; 50/60Hz; 1833mA; 200W-150W-100W
WORKING TEMP :	-40~+45(°C)
POWER FACTOR :	0.9
CRI(RA) :	>80
COLOR :	Black Color
LIGHT SOURCE :	Luminus SMD2835
LUMEN :	140 LM/W
LIFE TIME :	50000 hrs
BEAM ANGLE :	80°
PRODUCT SIZE :	11.02x4.67 inch / 13.31x5.02 inch
IP :	IP65
APPLICATION :	Warehouse, Factory, work shop and so on
WARRANTY :	5 years
STANDARD :	UL

200W-150W-100W

Changeable




MODEL NO. :


NX-UHBS7-150W-H-TC(XX)-Y
NX-UHBS7-200W-H-TCP(XX)(200/150/100)-Y

150W

220W-150W-100W

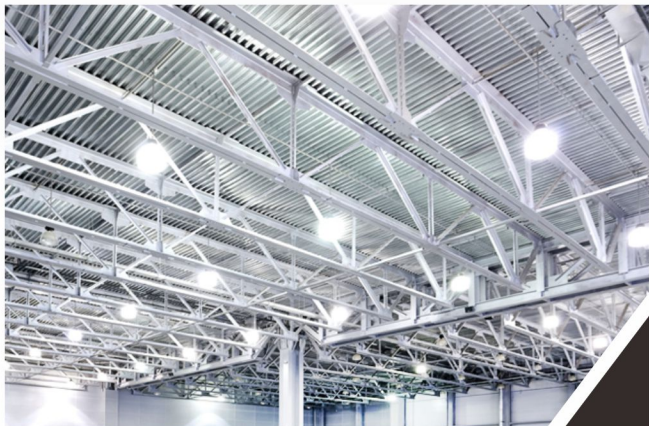

UFO HIGH BAY LIGHT **NX-UFOHB**



MODEL NO. :

NX-UFOHB-100W-2-6500K / NX-UFOHB-100W-2-5000K
NX-UFOHB-150W-2-6500K / NX-UFOHB-150W-2-5000K
NX-UFOHB-200W-2-6500K / NX-UFOHB-200W-2-5000K

100W / 150W / 200W



Color Temperature:



UFO HIGH BAY LIGHT

SPECIFICATION : AC180-265V; 100W / 150W / 200W

WORKING TEMP : -20~+50(°C)

POWER FACTOR : 0.95

CRI(RA) : >80

COLOR : Black Color

LIGHT SOURCE : HONGLI LEDs

LUMEN : 130 LM/W

LIFE TIME : 50000 hrs

BEAM ANGLE : 120 °

PRODUCT SIZE : Φ253*158 mm / Φ308*158 mm / Φ354*158 mm



IP: IP65

LOCATION: Warehouse, Workshop, Supermarket, Industrial Facilities

APPLICATION : 5 years

WARRANTY : CE

3CCT LED LINEAR HIGH BAY **NX-LHBS6**

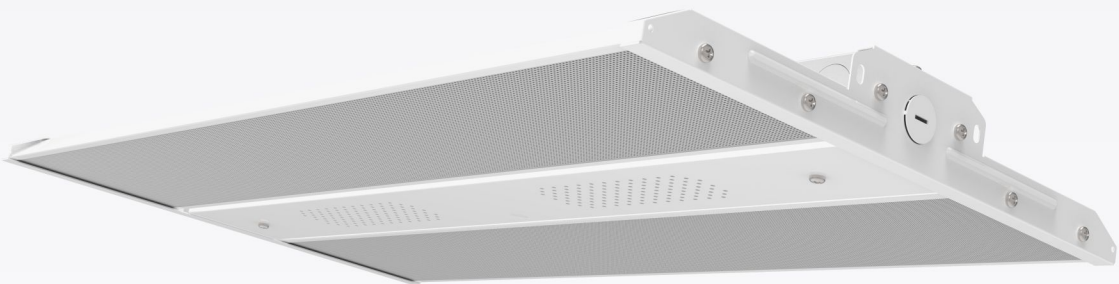

3CCT Changeable



3CCT LED LINEAR HIGH BAY

SPECIFICATION : AC120-277V; 50/60Hz ; 220W/165W/110W

WORKING TEMP : -40~+40°C

POWER FACTOR : 0.9

CRI(RA) : >80

COLOR : White Color

LIGHT SOURCE : Luminus SMD2835

LUMEN : 140 LM/W

LIFE TIME : 50000 hrs

BEAM ANGLE : 90°

PRODUCT SIZE : 23.62x14.17x1.87inch

IP : IP42

APPLICATION : Warehouse, indoor parking area, work shop and so on.

WARRANTY : 5 years

STANDARD : UL

COLOR TEMP : 3500K-4000K-5000K Changeable

220W-165W-110W

Changeable




MODEL NO. :

NX-LHBS6-L3-220W-H-TCP(XX)(220/165/110)

220W-165W-110W



NX-CP01 EXPLOSION PROOF CANOPY LIGHT **NX-GS0515**

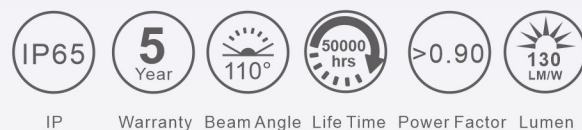


EX II 2 GD c IIC 45 C (T5)



150W


Color Temperature:



MODEL NO. : NX-CP01-150W


EXPLOSION PROOF CANOPY LIGHT

SPECIFICATION :	AC100-277V; 150W
WORKING TEMP :	-40~+70(°C)
POWER FACTOR :	0.90
CRI(RA) :	> 80
COLOR :	White Color
LIGHT SOURCE :	Lumileds SMD3030
LUMEN :	18000 LM
LIFE TIME :	50000 hrs
BEAM ANGLE :	120°
PRODUCT SIZE :	380*380mm
IP :	IP65
APPLICATION :	Gas Station, Workshop, Warehouse, Garage
WARRANTY :	5 years
STANDARD :	CE, Rohs, Atex, ETL

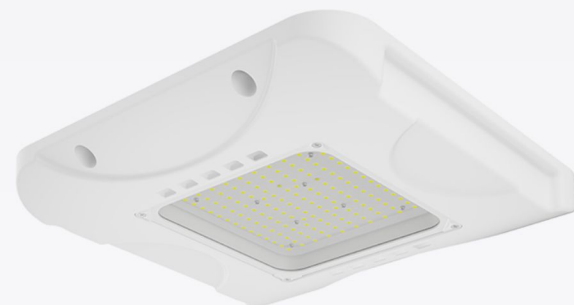

150W

Color Temperature:




MODEL NO. : NX-GS0515-150W

EXPLOSION PROOF CANOPY LIGHT

SPECIFICATION :	AC120-277V; 50/60Hz ; 150W
WORKING TEMP :	-40~+40(°C)
POWER FACTOR :	0.90
CRI(RA) :	>80
COLOR :	White Color
LIGHT SOURCE :	Luminus SMD2835
LUMEN :	19500 LM
LIFE TIME :	50000 hrs
BEAM ANGLE :	110°
PRODUCT SIZE :	16.54 *16.54 *2.64 inch
IP :	IP65
APPLICATION :	Gas stations, factories, supermarket...etc
WARRANTY :	5 years
STANDARD :	UL

LED EXPLOSION-PROOF LIGHT **NX100WWH**



Color Temperature:



LED EXPLOSION-PROOF LIGHT

SPECIFICATION :	AC85-265V ; 100W
WORKING TEMP :	-35~50(°C)
POWER FACTOR :	0.95
CRI(RA) :	80
COLOR :	Dark Grey
LIGHT SOURCE :	Philips 3030
LUMEN :	12254 LM
LIFE TIME :	50000 hrs
BEAM ANGLE :	110°
PRODUCT SIZE :	320*320*140mm
IP :	IP65
APPLICATION :	Gas station, Warehouse, Factory
WARRANTY :	5 years
STANDARD :	CE, CNEX

MODEL NO. :

NX100WWH

100W

