



VIDEO



WW-02

LED WALL WASHER LIGHT

18W

36W

72W

specification

PRODUCT NAME :	LED WALL WASHER LIGHT
MODEL NO. :	WW-02 18W/36W/72W
SPECIFICATION :	DC24V, 18W/36W/72W
WORKING TEMP :	-20~50(°C)
CRI(RA) :	>80
COLOR :	GRAY
LIGHT SOURCE :	SMD
LUMEN :	80 LM/W
BEAM ANGLE :	15°
PRODUCT SIZE :	290*72*102mm/530*72*102mm/1010*72*102mm
IP :	IP65
APPLICATION :	Garden, villa, commercial building..etc.
WARRANTY :	3 years
STANDARD :	CE

Color Temperature:

6500K / 4000K / 3000K




15W

LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LED Mounted Ceiling Downlight	TYPE:	WEIGHT:
SPEC.: COB66 15W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:53	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 79.50 lm/W
MODEL	COB66 15W	Imax (cd)	2044	S/MH (C0/180)		0.58
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)		0.60
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1167.6	η UP, DN (C0-180)		2.0, 47.4
NOMINAL FLUX (lm)	1167.61	CIE CLASS	DIRECT	η UP, DN (C180-360)		1.3, 49.3
LAMPS INSIDE	1	η up (%)	3.3	CIBSE SHR NOM		0.50
TEST VOLTAGE (V)	220	η down (%)	96.7	CIBSE SHR MAX		0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

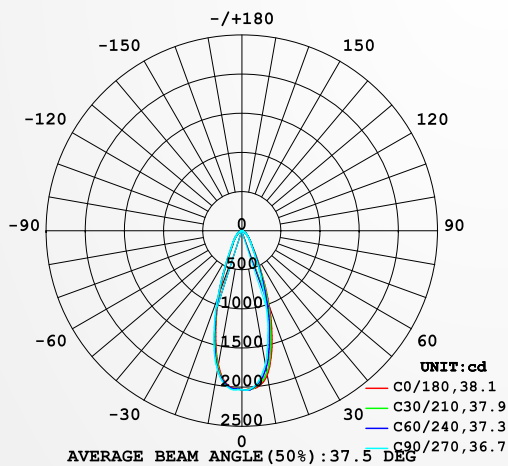

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

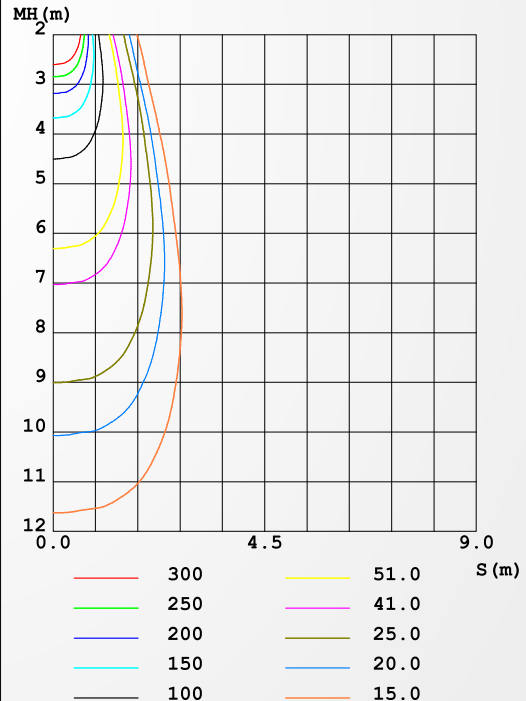

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators: JACK
Test Date: 2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 63.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS




15W

AAI FIGURE

NAME: LED Mounted Ceiling Downlight	TYPE:	WEIGHT:
SPEC.: COB66 15W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:53	Shielding Angle:

Flux out:504.3 lm

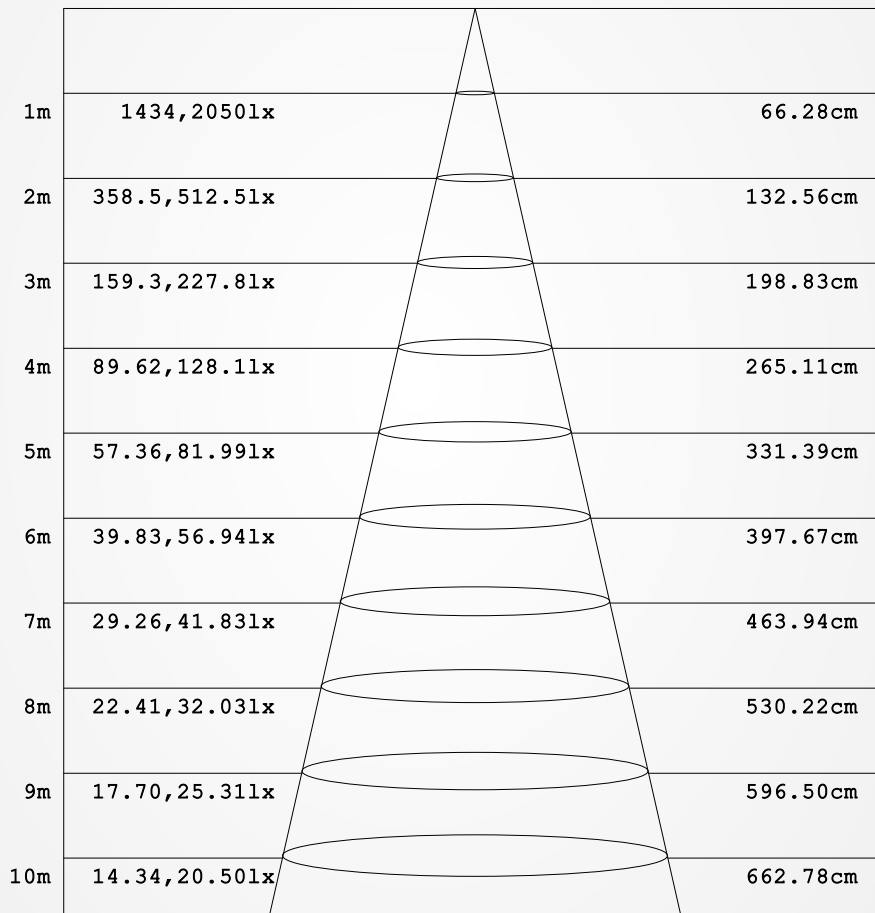

Height Eavg, Emax Angle:36.67deg Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators: JACK
Test Date: 2021-07-01

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.407.13
Humidity: 63.0%
Test Distance: 11.565m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS