



VIDEO



LED Track Light

30W

specification

Product Name :	LED Track Light
Model No. :	NXTL01
Specification :	AC175-265V,50Hz ,140mA,30W
Working Temp :	-20~45(°C)
Power Factor :	0.9
CRI(ra) :	90
Housing Color :	Black
Light Source :	COB 30W
Lumen :	2800 LM
Track System:	2 Wires
Life Time :	25000 hrs
Beam Angle :	24°±4°
Product Size :	Φ75*168mm
IP :	IP20
Application :	Home, Shop, Hotel...etc
Warranty :	3 years
Standard :	CE

Color Temperature:

3000K / 4000K / 5700K







30W

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED Track Light	TYPE: 3000K	WEIGHT:
SPEC.: 30W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 95.60 lm/W
MODEL	NXTL01	Imax (cd)	12096	S/MH (C0/180)	0.50	
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/270)	0.43	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	2693.8	η UP, DN (C0-180)	0.5, 42.8	
NOMINAL FLUX (lm)	2693.8	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.3, 56.4	
LAMPS INSIDE	1	η up (%)	0.8	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	220	η down (%)	99.2	CIBSE SHR MAX	0.30	

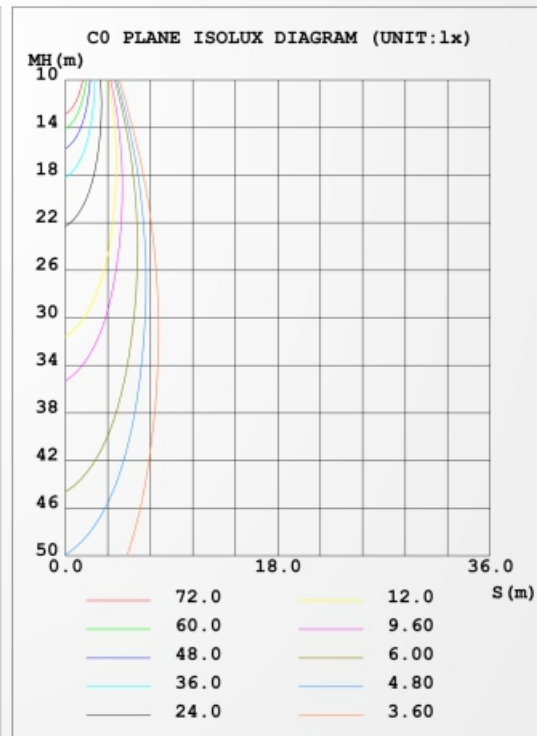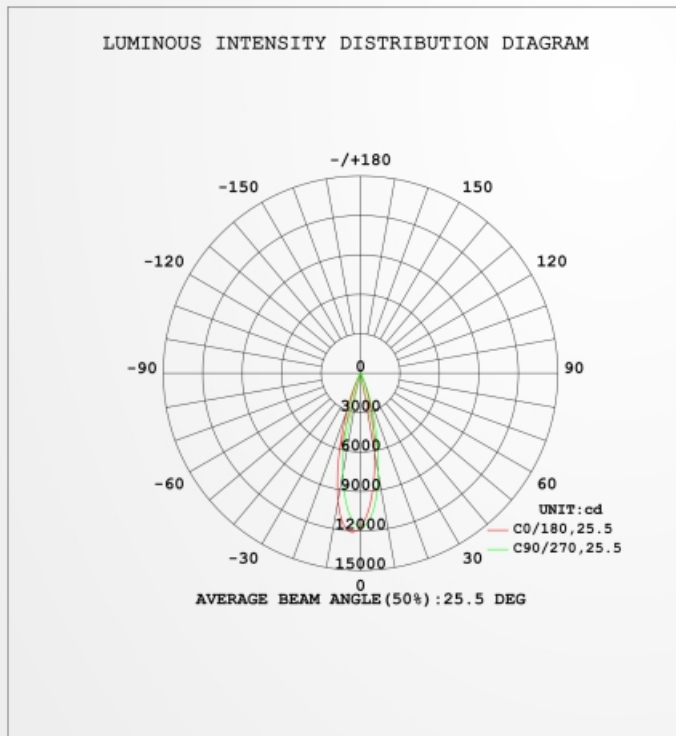

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3C
 Operators: 01
 Test Date: 2024-07-15

γ Range: 0 - 150DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.479
 Humidity: 65.0%
 Test Distance: 10.000m [K=1.0000]
 Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS




30W

AAI FIGURE

NAME: LED Track Light	TYPE: 3000K	WEIGHT:
SPEC.: 30W	DIM.:	SERIAL No.:
MFR.: NEXLEDS	SUR.:	Shielding Angle:

Flux out:1377 lm

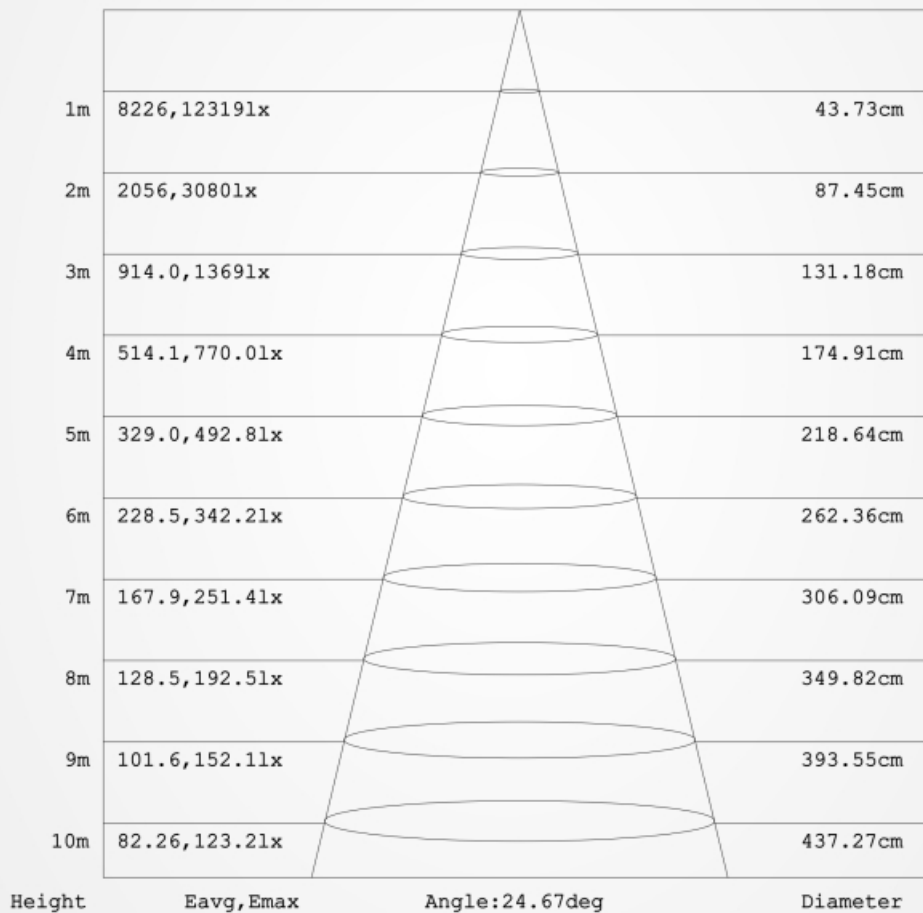

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3C
Operators:01
Test Date:2024-07-15

γ Range: 0 - 150DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:



JOIN US ON OUR
FACEBOOK PAGE +

NEXTLITE PRODUCTS